



Welcome to the world of Triplog!

We hope that your Triplog will make your everyday life a little bit easier. For more information and updates, please visit our web site www.triplog.eu

This symbol shows important steps you should follow 

Disclaimer

Information in this document is subject to change without notice. 2009 Opus Prodox. All rights reserved.

Important: There are two ways to install Triplog in your car, by OBD cable or by pulse cable. If a pulse cable installation is required contact your workshop. Opus Prodox is not liable for any extra cost.


Contents



Memory module




Battery




USB Radio module




Installation DVD




Car Interface



GPS receiver



OBD cable



Pulse cable

What type of installation?

Triplog can be installed in two ways, either by the OBD connector or by a pulse cable. The OBD connector is a connector that all petrol cars after 2001 have and all diesel cars after 2005. The connector is placed somewhere close to the driver's seat. The socket can be hidden behind a cover.

Important! Although Triplog installed with OBD cable should work in your car, there is no guarantee. Contact your Triplog retailer for more information. For different reasons, mainly depending on the car manufacturers, pulse cable installation may be the only option. A professional workshop can help you with this installation. If the workshop needs documentation regarding this, please contact your retailer. We recommend using a workshop authorized by your car manufacturer.


 If you will use the OBD connector, connect the OBD cable to the OBD socket.

Install the GPS

 Mount the antenna flat side down on the dashboard with the adhesive pad. It is important that the antenna is placed as openly as possible.

Connect the cables

 Connect the cables. Note that you only should connect the OBD **OR** Pulse cable

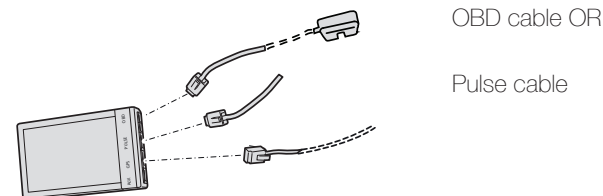


OBD cable OR


Pulse cable


If you are installing using a pulse cable you must also calibrate the Triplog. Please refer to the installation instructions for pulse cable!

Note the odometer reading

 Note the odometer reading and the time, you will need this when you start using the PC software.

Insert the battery in the memory module

 Insert the battery in the battery holder and assemble the Memory module with the enclosed screw.



Note that the memory module trip type indicators will only show yellow until you have made the first connection with your PC

Install the software

 Insert the DVD in the DVD player. A complete manual is enclosed on the DVD or you can find it on www.triplog.eu

The setup will install the latest version available if your computer is connected to the internet (recommended). The user's manual will be installed on your computer and is also available on our web site.